
## Sihovision SHENZHEN SHINHO ELECTRONIC TECHNOLOGY CO., LTD

Professional Industrial Panel PC manufacturer

Address: Room 622, Hongyi Building, No. 227, Fulian Area, Sanlian Community, Longhua District, Shenzhen, China. Web: www.sihovision.com Phone: +86 0755 23747569 Mobile: 0086 13798532807 Email: amy@sihovision.com

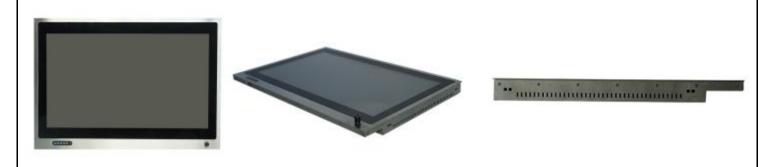

## Features:

- 1. Robust and durable stainless steel enclosure, front panel IP65 waterproof.
- 2. 27" Industrial LCD panel, High resolution: 1920\*1080, high brightness 1000 nits, sunlight readable.
- 3. With a dimmer on the bezel to adjust the brightness, can adjust the brightness from 100% to 0.
- 4. High performance mainboard, 7x24 continuous operation.
- 5. VGA+HDMI+DVI+USB for touch, 12V Phoenix terminal.
- 6. Adopt multi-points PCAP touch panel, high sensitive and fast-response. Covered with 2mm tempered glass for vandalproof.
- 7. Support wall mounting, embedded mounting, desk stand mouting etc.

Model:SL27		
LCD panel		
Panel size	27"	
Resolution	1920*1080	
Aspect ratio	16:9	
Support Color	16.7M colors	
Brightness (cd/m²)	1000 nits, sunlight readable	
Brightness control	Dimmer	
Contrast ratio	1000:1	
View angle	80°/80°/80° (R/L/U/D)	
Touch panel		
Touchscreen Type	Project Capacitive Touch (10 points )	
Surface Hardness	7H	
Luminousness	90%	
Touch Interface	USB (RS232 optional)	
Touch response time	2ms	
Working Life	>50 million times	
Touch options	(5 wires restive touch, IR touch optional)	

Singal Ports		
VGA	1xVGA	
HDMI	1xHDMI	
DVI	1xDVI	
OSD		
OSD control	Brightness, contrast ratio, auto adjustment, H/V position, language select etc.	
Support languages	English, French, Spanish, Portuguese, Italian, German, Russian, Japanese, Chinese etc.	
Support OS	Windows XP, Windwows /7/8/10, Linux, Mac OS X, Android, ect.	
Power Supply		
External Power Supply	AC 100-240V	

	· · · · · · · · · · · · · · · · · · ·	
Working voltage	DC 12V	
Power consumption	<40 W	
Enclosure		
Material	stainless steel case	
Color	Silver	
VESA mounting	100x100 mm	
IP grade	Front panel IP65 waterproof	
Operating Environment		
Temperature Range	operating: -10 to 60°C, storage: -20 to 70°C	
Relative humidity	operating: 10% to 90%, storage: 5% to 90%	
Packing Details		
Net weight	11 kg	
Gross weight	13 kg	
Product Dimension	68.8x47.1x4 cm	
Packing size	87x58x17 cm	
Accessories	Power adapter, power cord, HDMI cable, USB touch cable, 12V Phoenix terminal cable, embedded screws	
Other		
Mounting (options)	1) Embedded screws	
	2) wall brackets for wall-mounting, VESA 100×100 mm	
	3) stable metal holder to support the monitor	
Warranty	1 year warranty	